




Features:

- Dipolar Ribbon Tweeter
- Wide and Natural Soundstage
- For Open Baffle Loudspeakers
- 6 Ohm Impedance
- Laminated Aluminum Diaphragm
- 1 kHz to 40 kHz Response

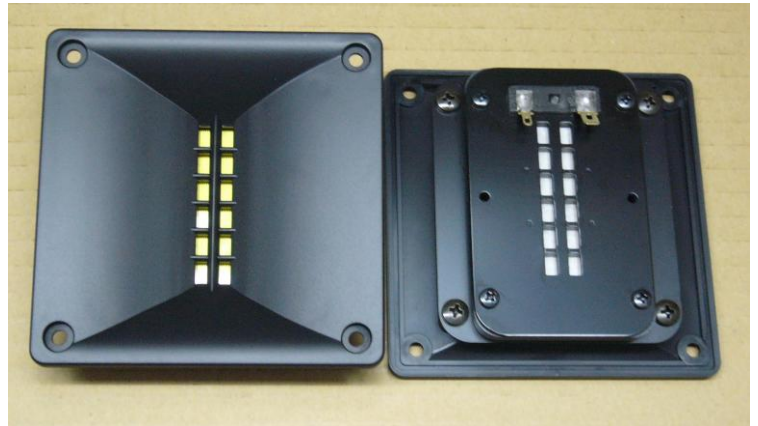

Specifications:

Nominal Impedance	6 Ohm
Sensitivity	91 dB @ 1 W / 1 m
Recommended Crossover	3.0 kHz or higher
Power Handling	40 W Continuous / 3rd Xover, $Q \leq 0.707$, $F_c = 4$ kHz
Diaphragm	Laminated Aluminum
Magnet	Nd-Fe-B
Weight	180 grams
Application Notes: Lower crossover frequencies may be used in carefully designed systems, but power handling will decrease accordingly.	

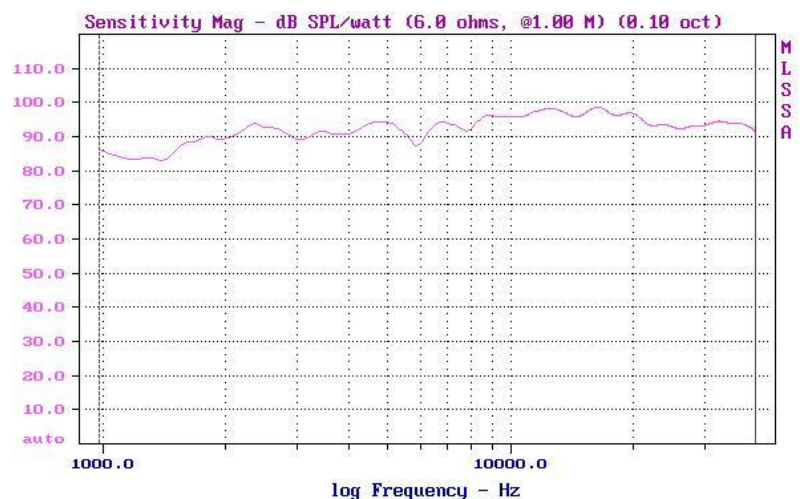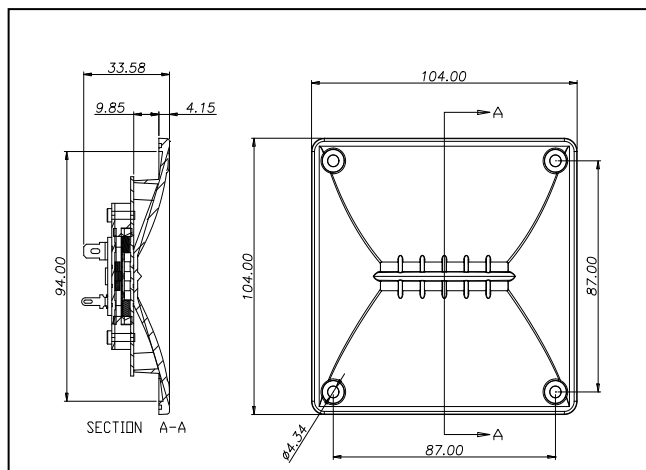

BESTON Technology Corporation

Office: Taipei, Taiwan

TEL: (886)-2-23892956 FAX: (886)-2-23892952

E-Mail: service@ribbonspeaker.com.tw

www.ribbonspeaker.com.tw