




## Features:

- Professional Ribbon Driver
- Enhanced Motor System
- High Sensitivity Design
- Laminated Kapton/ AL /Kapton Diaphragm
- High Power Capability
- Enhanced Service Life

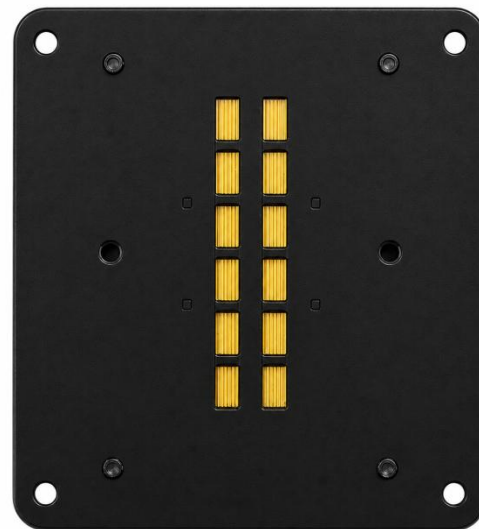

## Specifications:

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| Nominal Impedance     | 6 Ohm                                                       |
| Frequency Response    | 2.0 kHz ~ 40 kHz                                            |
| Sensitivity           | 97 dB @ 2.83 V / 1 m with RT002A Waveguide II               |
| Recommended Crossover | More than 2.5 kHz                                           |
| Power Handling        | 40 W Continuous / 3rd Xover, $Q \leq 0.707$ , $F_c = 3$ kHz |
| Diaphragm             | Laminated Kapton/ Aluminum /Kapton Diaphragm                |
| Magnet                | Nd-Fe-B                                                     |
| Weight                | 145 grams                                                   |

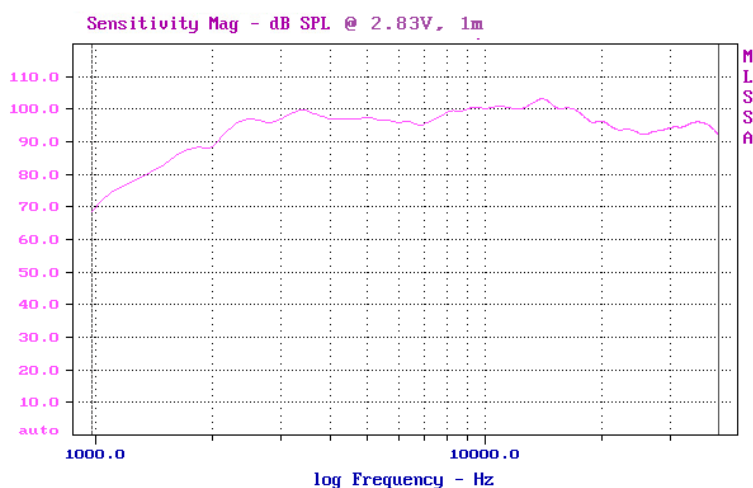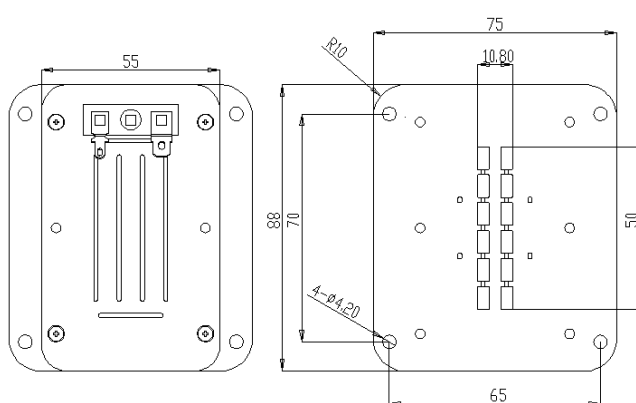

**BESTON Technology Corporation**

Office: Taipei, Taiwan

TEL: (886)-2-23892956 FAX: (886)-2-23893952

E-Mail: [service@ribbonspeaker.com.tw](mailto:service@ribbonspeaker.com.tw)

[www.ribbonspeaker.com.tw](http://www.ribbonspeaker.com.tw)