



## Features:

- Ribbon Driver
- 2K Hz to 40K Hz Response
- 92 dB Sensitivity
- 6 Ohm Impedance
- Laminated Aluminum Diaphragm
- Ultra-thin Diaphragm



## Specifications:

|                       |                                                 |
|-----------------------|-------------------------------------------------|
| Nominal Impedance     | 6 Ohm                                           |
| Frequency Response    | 2.0 kHz ~ 40 kHz                                |
| Sensitivity           | 92 dB @ 1 W / 1 m with RT002A Waveguide I       |
| Recommended Crossover | More than 2.5 kHz                               |
| Power Handling        | 40 W Continuous / 3rd Crossover, $Q \leq 0.707$ |
| Diaphragm             | Laminated Aluminum                              |
| Magnet                | Nd-Fe-B                                         |
| Weight                | 140 grams                                       |

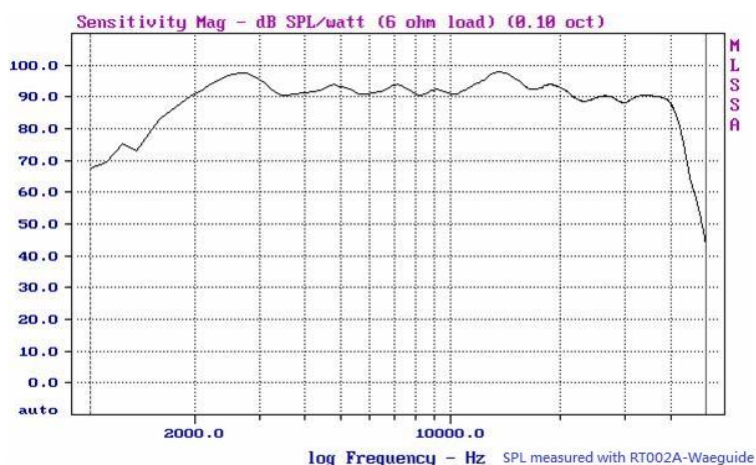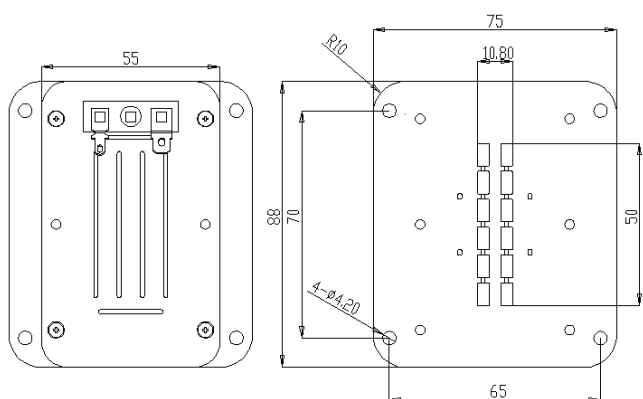

**BESTON Technology Corporation**

Office: Taipei, Taiwan

TEL: (886)-2-23892956 FAX: (886)-2-23892952

E-Mail: [service@ribbonspeaker.com.tw](mailto:service@ribbonspeaker.com.tw)

[www.ribbonspeaker.com.tw](http://www.ribbonspeaker.com.tw)