
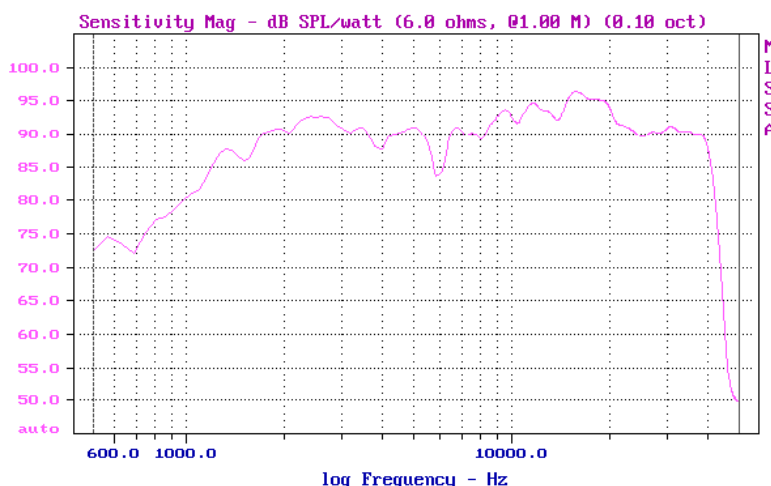
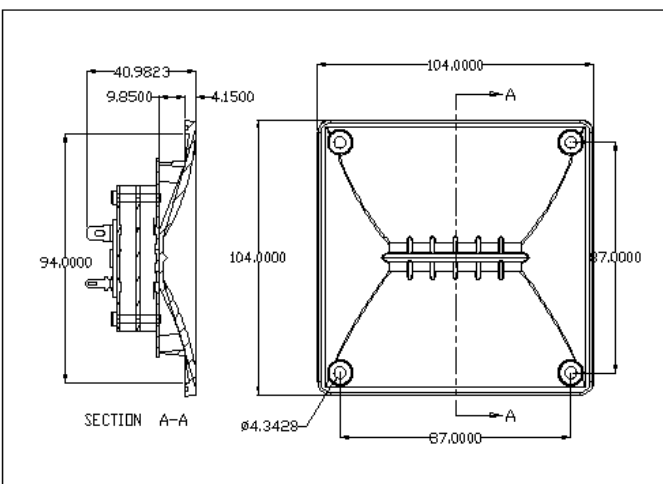


Features:

- Ribbon Tweeter
- 1.5K Hz to 40K Hz Response
- 92 dB Sensitivity
- 6 Ohm Impedance
- Laminated Aluminum Diaphragm
- Ultra-thin Diaphragm

Specifications:

Nominal Impedance	6 Ohm
Frequency Response	1.5K Hz ~ 40K Hz
Sensitivity	92 dB @ 1W/1m
Recommended Crossover	More than 2 K Hz
Power Handling	40 W Continuous / 3 rd Crossover, $Q \leq 0.707$
Diaphragm	Laminated Aluminum
Magnet	Nd-Fe-B
Weight	240 grams

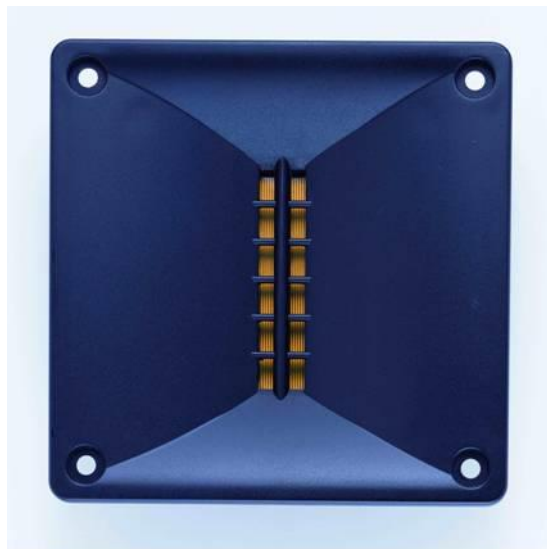

BESTON Technology Corporation

Office: Taipei, Taiwan

TEL: (886)-2-23892956 FAX: (886)-2-23892952

E-Mail: service@ribbonspeaker.com.tw

www.ribbonspeaker.com.tw