



## Features:

- Ribbon Driver
- 1.5K Hz to 40K Hz Response
- 100 dB Sensitivity
- 16 Ohm Impedance
- Laminated Aluminum Diaphragm
- High Power Rating



## Specifications:

Nominal Impedance	16 Ohm
Frequency Response	1.5K Hz ~ 40K Hz
Sensitivity	100 dB @ 1W/1m
Recommended Crossover	More than 2 K Hz
Power Handling	60 W Continuous / 3 <sup>rd</sup> Crossover, $Q \leq 0.707$
Diaphragm	Laminated Aluminum
Magnet	Nd-Fe-B
Weight	570 grams

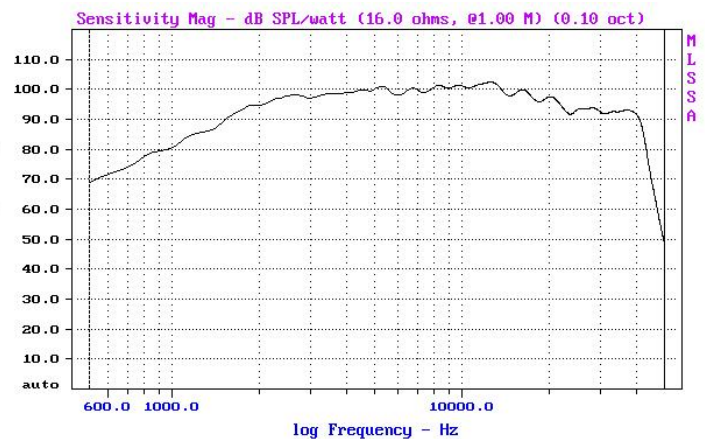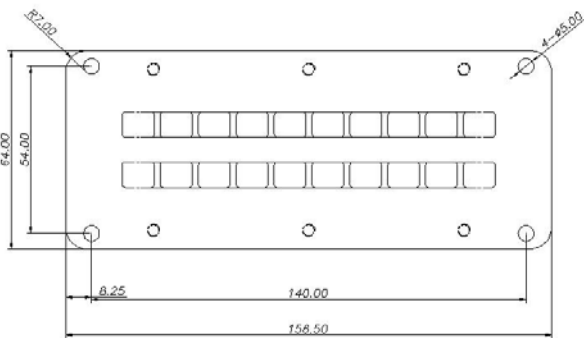

**BESTON Technology Corporation**

Office: 5F-13, No. 9, Ai Kuo West Rd., Taipei 100, Taiwan

TEL: (886)-2-23892956 FAX: (886)-2-23892952

E-Mail: [s272@ms45.hinet.net](mailto:s272@ms45.hinet.net) [Beston2000@gmail.com](mailto:Beston2000@gmail.com)

[www.ribbonspeaker.com.tw](http://www.ribbonspeaker.com.tw)