



Features:

- Super Tweeter
- Response to Higher than 40K Hz
- 95 dB Sensitivity
- 6 Ohm Impedance
- Laminated Aluminum Diaphragm
- Ultra-thin Diaphragm



Specifications:

Nominal Impedance	6 Ohm
Frequency Response	3K Hz ~ 40K Hz
Sensitivity	95 dB @ 1W/1m
Crossover	1 st Order Crossover 6 K / 9K / 12K / 15K Hz
Power Handling	30 W Continuous
Diaphragm	Laminated Aluminum
Magnet	Nd-Fe-B
Weight	470 grams

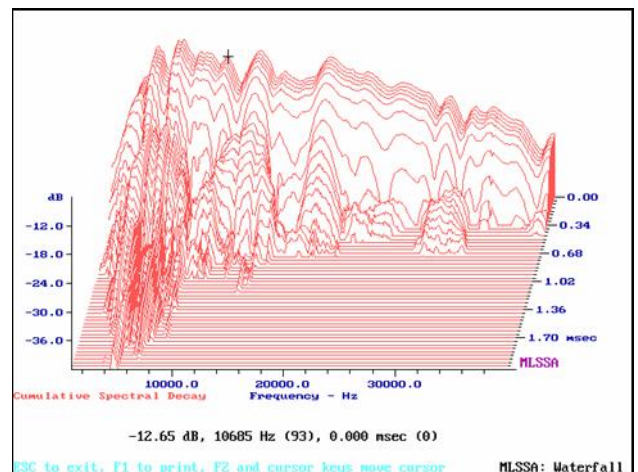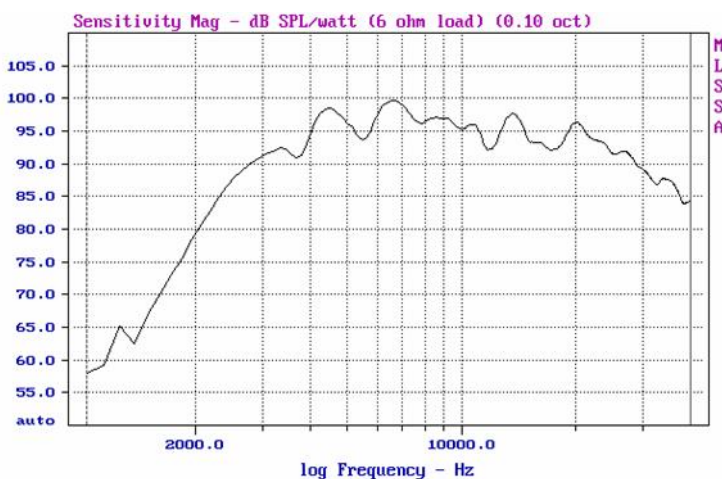

BESTON Technology Corporation

Office: 5F-13, No. 9, Ai Kuo West Rd., Taipei 100, Taiwan

TEL: (886)-2-23892956 FAX: (886)-2-23892952

E-Mail: s272@ms45.hinet.net